

Flexlight

Lodge 6002 - 6002 Stripes - 6002 Opaque

Main applications

Bungalows
Lodges
Glamping



High durability
and natural appearance

All weather protection, high-end look
and phthalate free for exquisite outdoor
projects requiring the best canvas

Major advantages


- Easy maintenance with matt PVDF varnish
- Lightweight, durable, 100% recyclable
- Very high flexibility and easy handling
- Grainy aspect and matt finish for an ultra-contemporary, natural appearance
- Greenguard certified for indoor air quality



Technical specifications

Flexlight		
	Lodge	Lodge
	6002 - 6002 Stripes	6002 Opaque
Weight	630 g/m² - EN ISO 2286-2	730 g/m² - EN ISO 2286-2
Standard format length	50 lm	50 lm
Tensile strength (warp/weft)	250/250 daN/5 cm - EN ISO 1421	250/250 daN/5 cm - EN ISO 1421
Tear strength (warp/weft)	20/20 daN - DIN 53.363	20/20 daN - DIN 53.363
Finish	Matt PVDF	Matt PVDF
Flame retardancy	B-s2, d0 /EN 13501-1 — M2 /NFP 92-507 B1 /DIN 4102-1 — CAN/ULC-S109 Method 2 /NFPA 701 VKF 5.3 /SN 198898 — Classe 2 /UNI 9177 BS 7837 — 1530.2 and 3 /AS/NZS G1 /GOST 30244-94 — Class A /ASTM E84 M2 /UNE 23-727-90 — CSFMT19 • CPAI 84	B-s2, d0 /EN 13501-1 M2 /NFP 92-507 B1 /DIN 4102-1
Warranty	5 years	5 years
Maximum delivery time	3 working weeks	4 working weeks
Provided services	Jumbo rolls Cut length Length/width adjustment Short production runs Promised delivery guaranteed up to 500 lm	Jumbo rolls Cut length Length/width adjustment Short production runs


Smart Coating
Technology

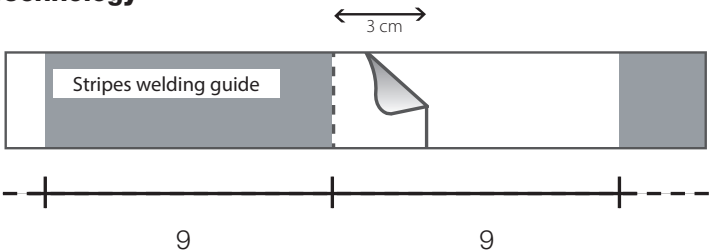


Flexlight

Lodge 6002 - 6002 Stripes - 6002 Opaque


13 colours & references
Flexlight Lodge 6002

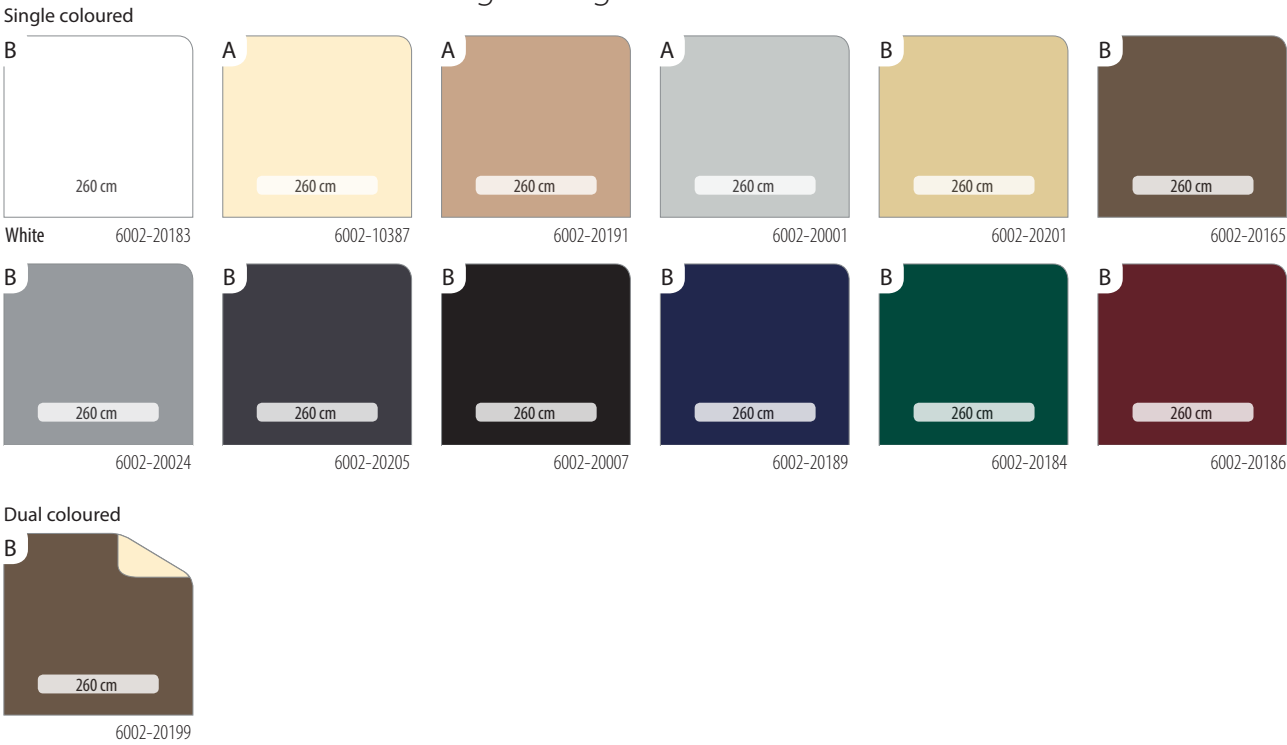

1 colour & reference
Flexlight Lodge 6002 Stripes



3 colours & references
Flexlight Lodge 6002 Opaque

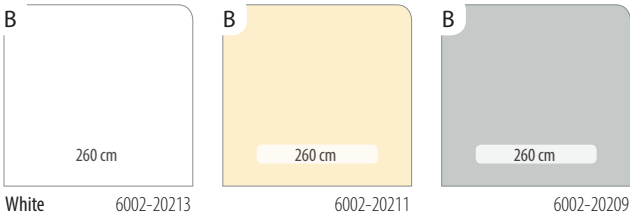

A : Available B : Best effort C : Custom made

260 cm: Available in 260 cm width 261 cm: Available in 261 cm width